



Technology Innovator

Puya

AN1100E

Application Note

PY32E407 Application Note

Introduction

The PY32E407 series microcontroller uses high-performance 32-bit ARM® Cortex®- M4F Core MCU. Embedded with the Flash up to 512 Kbytes and the SRAM memory up to 144 Kbytes, and with the maximum operating frequency of 170 MHz. The PY32E407 contains multiple packaging types and products.

This document will help users understand the attentions for the application of various modules in PY32E407 and quickly start development.

Table 1 Applicable Products

Type	Product Series
Microcontroller Series	PY32E407

Contents

1	PWR Configuration.....	3
2	RCC Configuration	3
3	FLASH Configuration	3
4	GPIO Configuration	4
5	Option Configuration.....	4
6	Version History	7

1 PWR Configuration

- To reduce the power consumption in STANDBY mode, it is recommended to configure the registers (PWR->CR1_SRAM_RETV, PWR->CR1_VOS) to 0x2 before entering STANDBY.
- Configuring the MCU to Standby mode through software needs 31 system clock cycles to completely enter the Standby mode. If an NRST reset or wake-up signal is generated, both the reset and wake-up will fail.

2 RCC Configuration

- If the LSI is enabled before entering the Standby mode, the LSI RDY bit (RCC->CSR.LSIRDY) will remain set and cannot be cleared by NRST or IWDG resets after the MCU is waked up from the STANDBY mode. But, it can be cleared by WWDG, POR, or a software reset (NVIC_SystemReset()).

3 FLASH Configuration

- When using the RWW (Read-While-Write) feature, do not access BANK0 while erasing or writing to BANK0, and do not access BANK1 while erasing or writing to BANK1 (e.g., during erasure or writing to BANK0, the default interrupt vector entry is BANK0, so entering an interrupt is equivalent to accessing BANK0);
- When using the RWW (Read Write) function, the erase program must not be placed at the end of BANK0 (usually referring to the last SECTOR, which is about 4K);
- When using the PCROP (proprietary code read protection) function, due to incomplete correspondence between logical and physical addresses, the two high-order blocks (0x00840000~0x0805FFFF) cannot be protected when the FLASH size is 384K.

SIZE	Logical address	Logic Block No		Physical Block No
384K	0x0800 0000 - 0x0800 FFFF	1	BANK0	0x0800 0000 - 0x0800 FFFF
	0x0801 0000 - 0x0801 FFFF	2		0x0801 0000 - 0x0801 FFFF
	0x0802 0000 - 0x0802 FFFF	3		0x0802 0000 - 0x0802 FFFF
				0x0803 0000 - 0x0803 FFFF
	0x0803 0000 - 0x0803 FFFF	4	BANK1	0x0804 0000 - 0x0804 FFFF
	0x0804 0000 - 0x0804 FFFF	5		0x0805 0000 - 0x0805 FFFF
	0x0805 0000 - 0x0805 FFFF	6		0x0806 0000 - 0x0806 FFFF
		0x0807 0000 - 0x0807 FFFF		
256K	0x0800 0000 - 0x0800 FFFF	1	BANK0	0x0800 0000 - 0x0800 FFFF
	0x0801 0000 - 0x0801 FFFF	2		0x0801 0000 - 0x0801 FFFF
				0x0802 0000 - 0x0802 FFFF
				0x0803 0000 - 0x0803 FFFF
	0x0802 0000 - 0x0802 FFFF	3	BANK1	0x0804 0000 - 0x0804 FFFF
	0x0803 0000 - 0x0803 FFFF	4		0x0805 0000 - 0x0805 FFFF
				0x0806 0000 - 0x0806 FFFF
		0x0807 0000 - 0x0807 FFFF		
128K	0x0800 0000 - 0x0800 FFFF	1		0x0800 0000 - 0x0800 FFFF
				0x0801 0000 - 0x0801 FFFF
				0x0802 0000 - 0x0802 FFFF
				0x0803 0000 - 0x0803 FFFF
	0x0801 0000 - 0x0801 FFFF	2		0x0804 0000 - 0x0804 FFFF
				0x0805 0000 - 0x0805 FFFF
				0x0806 0000 - 0x0806 FFFF
			0x0807 0000 - 0x0807 FFFF	

Figure 3-1 The correspondence between logical and physical addresses of BANK0 and BANK1

4 GPIO Configuration

- When only using Vbat pin to supply power, PC13 cannot be used.

5 Option Configuration

- When mass production, Option operation needs to be configured in the Option Byte configuration of the programmer, and the function that operates Option in the program should be blocked.
- It is recommended that the customer program enables write protection, which is set in Option, as shown in Figure 5-1 and Figure 5-2.

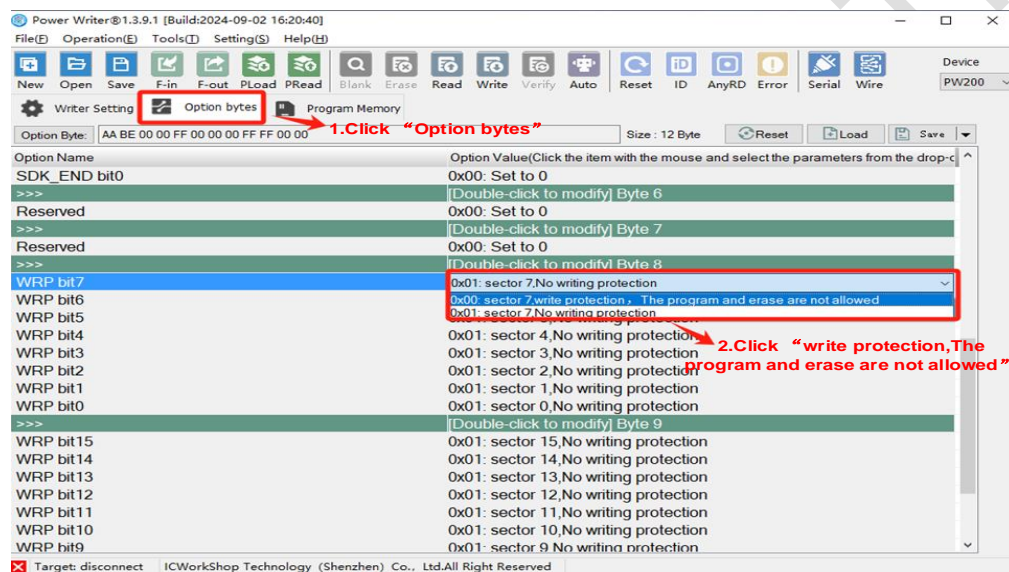


Figure 5-1 Power Write Operation Option Write Protection

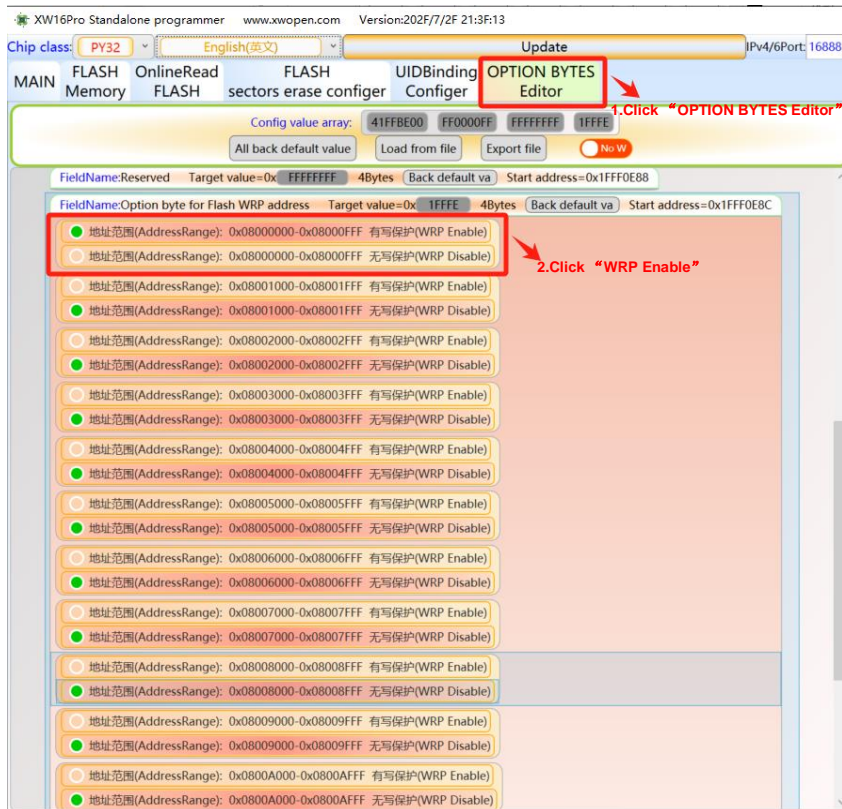


Figure 5-2 XW operation Option write protection

- When configuring the Option of the programmer, you need to check the "Smart Reset" function or "Restart the chip after programming" (programmers typically have similar options that need to be selected). The specific steps are shown in Figures 5-3, Figure 5-4.

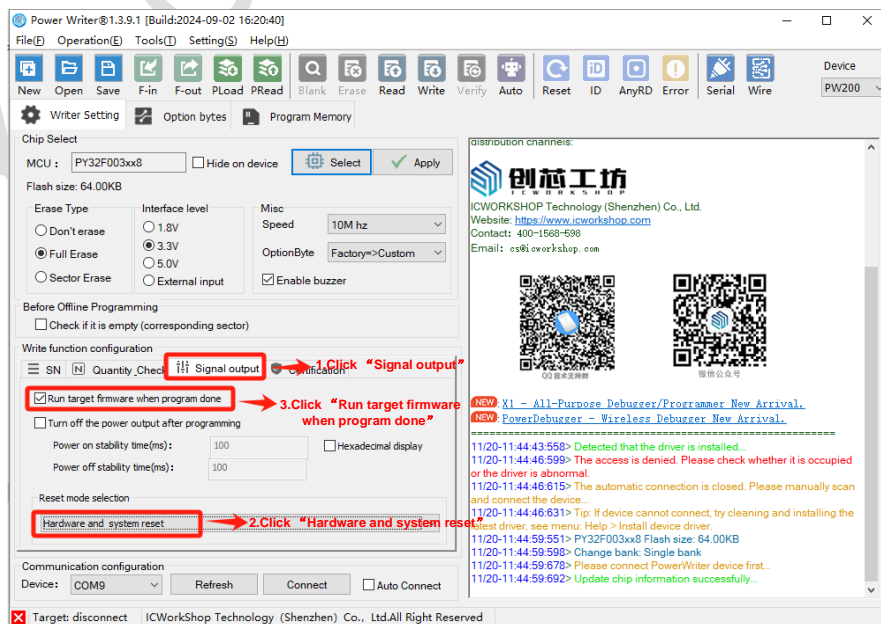


Figure 5-3 Power Write Operation Tick 'Reboot Chip After Programming'

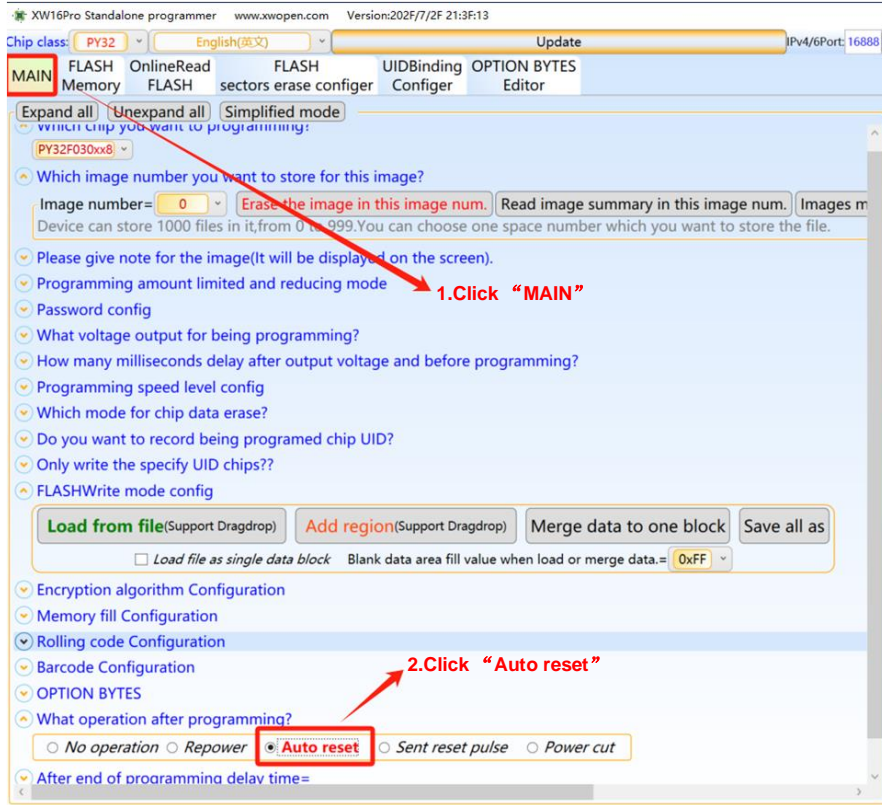


Figure 13-4 XW Operation 'Smart Reset'

6 Version History

Version	Date	Update Records
V1.2	2025.10.23	Initial release



Puya Semiconductor Co., Ltd.

IMPORTANT NOTICE

Puya reserve the right to make changes, corrections, enhancements, modifications to Puya products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information of Puya products before placing orders.

Puya products are sold pursuant to terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice and use of Puya products. Puya does not provide service support and assumes no responsibility when products that are used on its own or designated third party products.

Puya hereby disclaims any license to any intellectual property rights, express or implied.

Resale of Puya products with provisions inconsistent with the information set forth herein shall void any warranty granted by Puya.

Any with Puya or Puya logo are trademarks of Puya. All other product or service names are the property of their respective owners.

The information in this document supersedes and replaces the information in the previous version.

Puya Semiconductor Co., Ltd. – All rights reserved